



## Rotary Couplings

single, twin, four, six, eight and ten passages with/without leakage oil recirculation  
 max. operating pressure 500 bar

### General description

Rotary couplings supply the pressure oil to rotating and swivelling installations. They are mounted in the centre of rotation of the installation.

### Operating conditions

When selecting, operating pressure and speed have to be taken into account. Only use hydraulic oil of the viscosity classes 22, 32 and 46.

The rotary coupling has to be connected to the power unit on all levels to ensure sufficient lubrications of the seals.


The rotary couplings must only be used in a temperature range between +10 °C and +60 °C. This also applies to possible special versions with FKM seals.

Operating conditions, tolerances and other data see data sheet A 0.100.

### Special versions are available on request.

When placing an order, please indicate the most important operating data (pressure, temperature, medium, number of revolutions or cycle time) in order to allow a possible adaptation from standard for the application.


## Single Passage Rotary Coupling

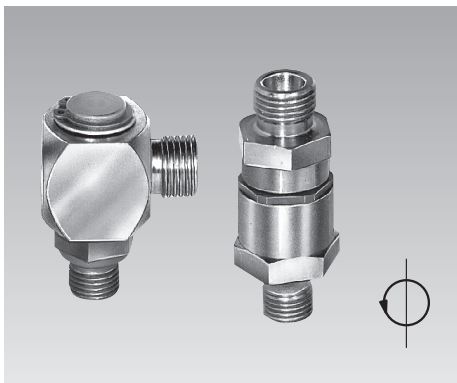


### Technical data

Range of operating pressure	10 – 500 bar
Admissible continuous speed	10 min <sup>-1</sup>
Starting torque	approx. 1.2 Nm
Tightening torque G1/4	55 Nm



### Angle swivel joint

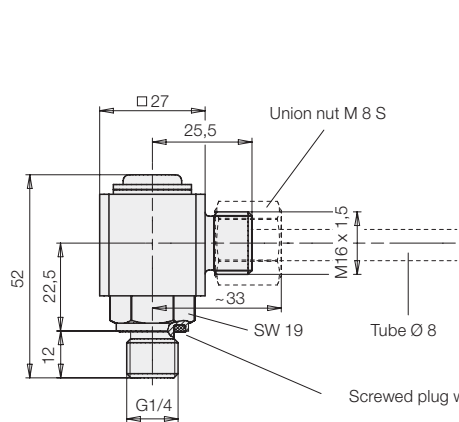
**Part no.**
**9208176**

### Axial swivel joint

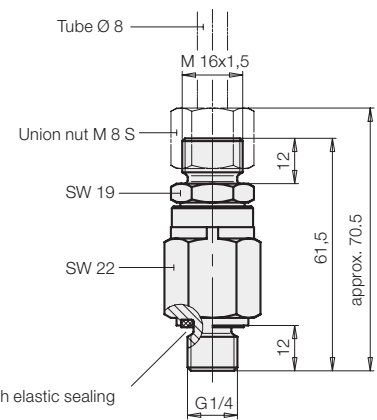
**Part no.**
**9208069**

### Application examples

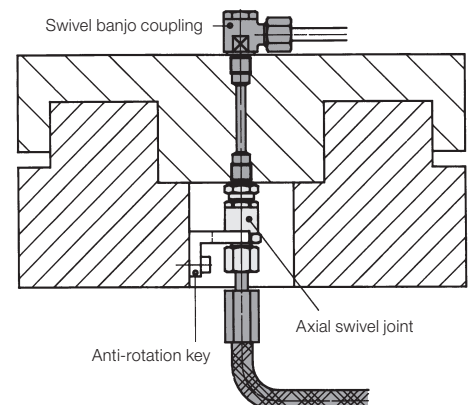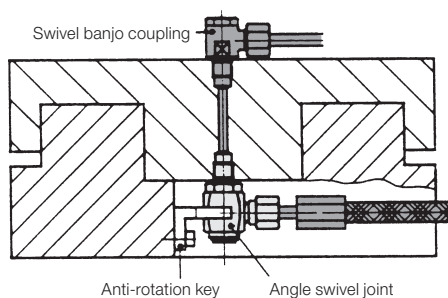


Operating conditions, tolerances and other data see data sheet A 0.100.


Twin Passage Rotary Coupling




Twin passage rotary coupling

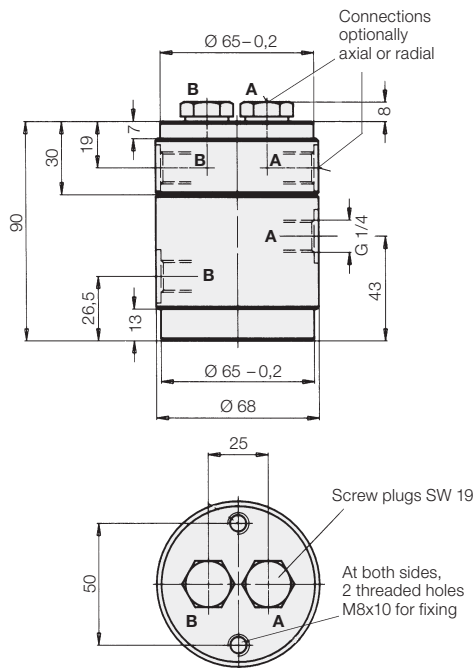


Twin passage rotary coupling  
with leakage oil recirculation in the housing

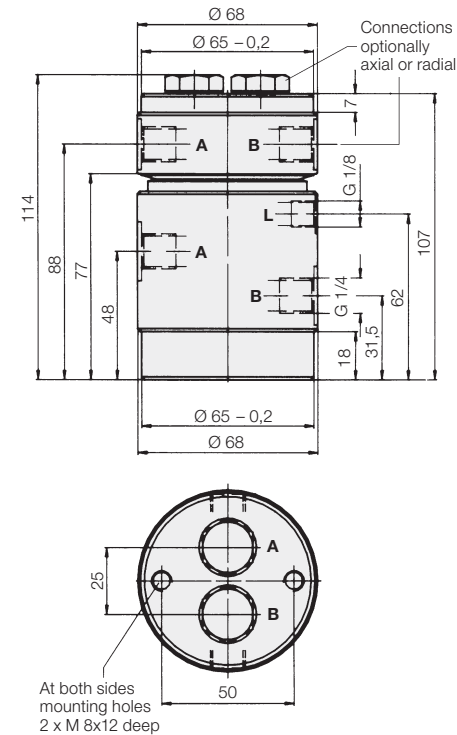

Hydraulic circuit diagram

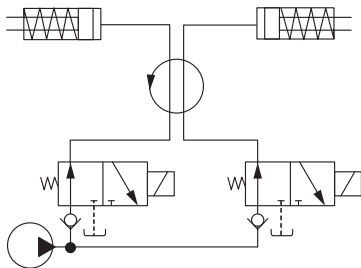

Hydraulic circuit diagram

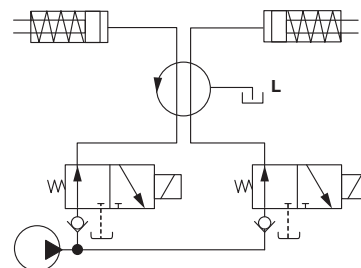

Rotary coupling ND 5

Operating pressure range [bar]      Leakage rate [cm<sup>3</sup>/100h]      Weight [kg]

Part no.

10 – 500      40      2.4      **9281 136**

Rotary coupling ND 5

with leakage oil recirculation in the housing


Operating pressure range [bar]

Weight [kg]


Part no.

10 – 500      2.75      **9281 135**

Max. admissible number of rotations n and starting torque M as a function of the operating pressure p

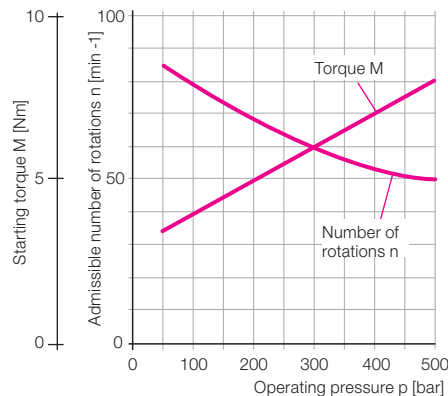


Application example

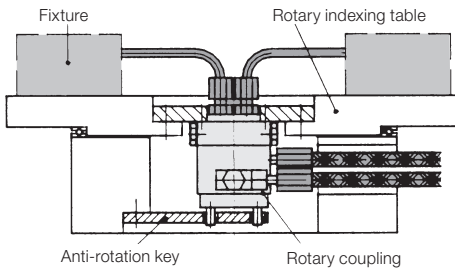


## Four Passage Rotary Coupling



**Four passage rotary coupling**

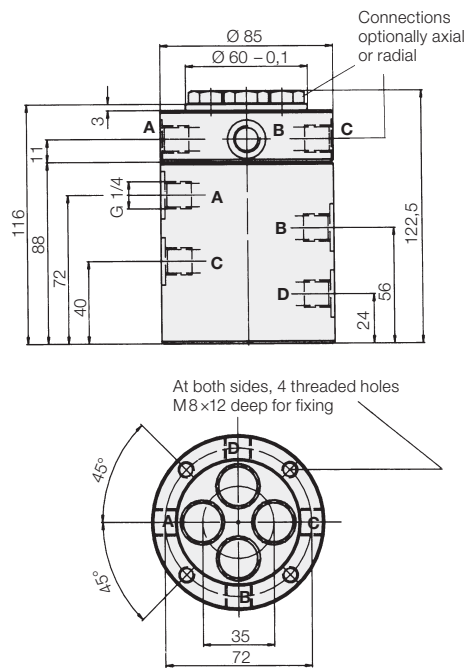


**Hydraulic circuit diagram**

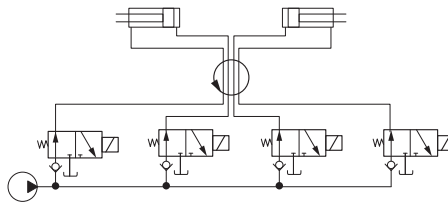


**Rotary coupling ND 5**

Operating pressure range [bar]	Leakage rate [cm³/100h]	Weight [kg]	Part no.
10 – 500	60	4.6	<b>9284 036</b>

**Four passage rotary coupling with leakage oil recirculation in the housing**

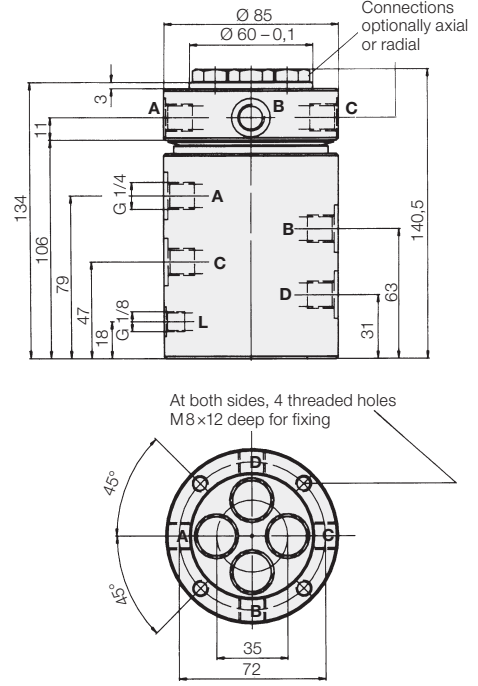


**Hydraulic circuit diagram**

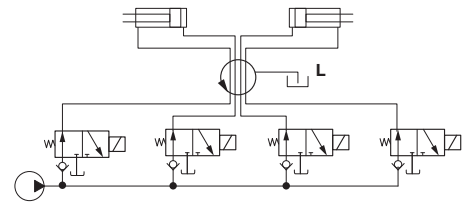


**Rotary coupling ND 5**

Operating pressure range [bar]	Weight [kg]	Part no.
10 – 500	5.5	<b>9284 135</b>

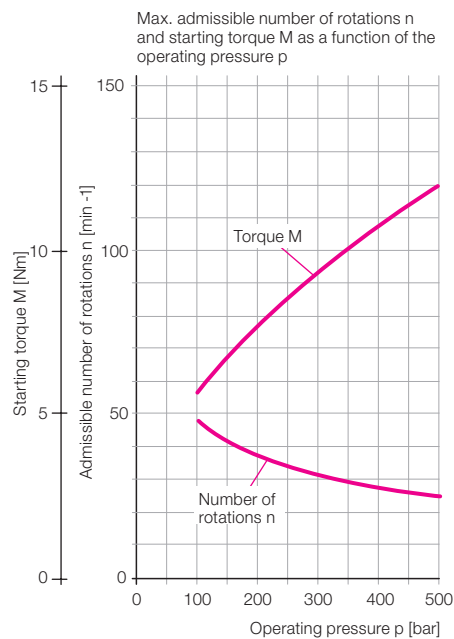

**Application example**

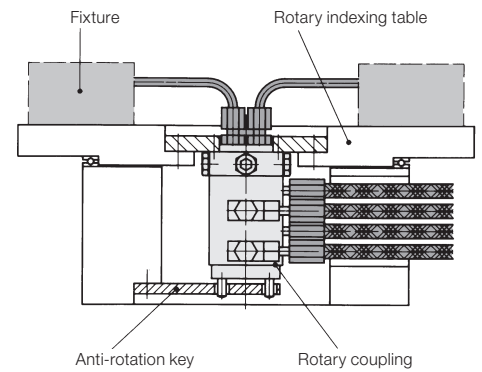


Operating conditions, tolerances and other data see data sheet A 0.100.

## Six Passage Rotary Coupling




### Six passage rotary coupling


with leakage oil recirculation in the housing

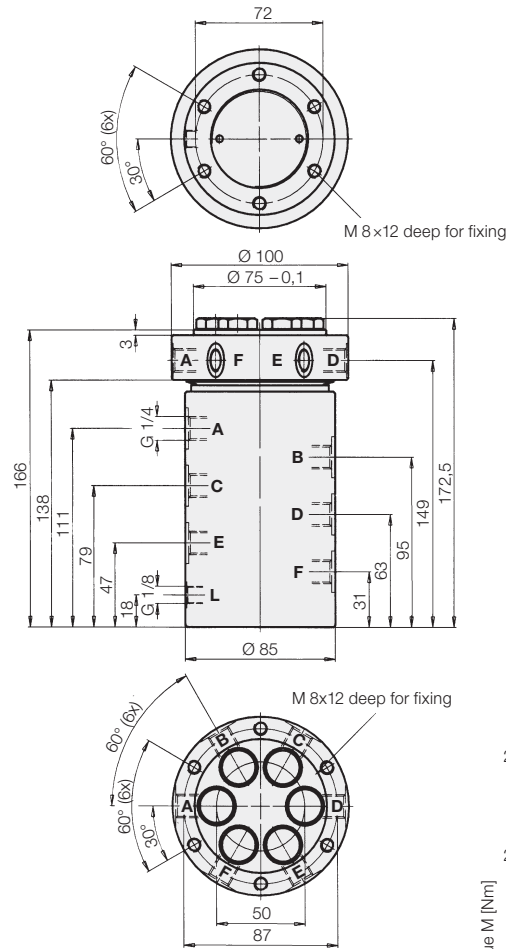

### Hydraulic circuit diagram

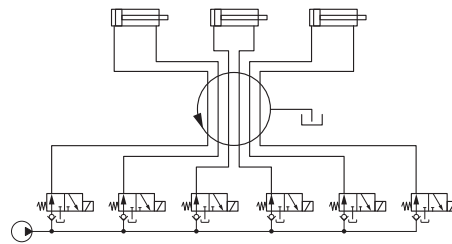

Max. admissible number of rotations  $n$  and starting torque  $M$  as a function of the operating pressure  $p$

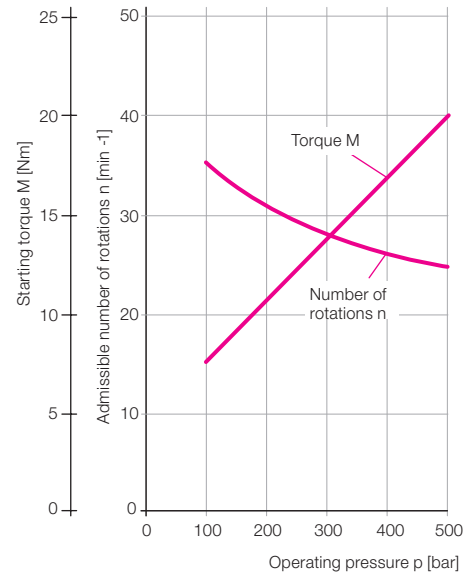

### Rotary coupling ND 5

Operating pressure range [bar]

Weight [kg]


Part no.

10 – 500

8.8

9286 135


### Application example

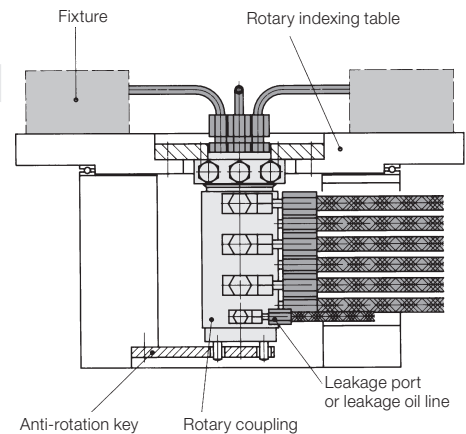


# Eight Passage Rotary Coupling




**Eight passage rotary coupling**  
with leakage oil recirculation in the housing

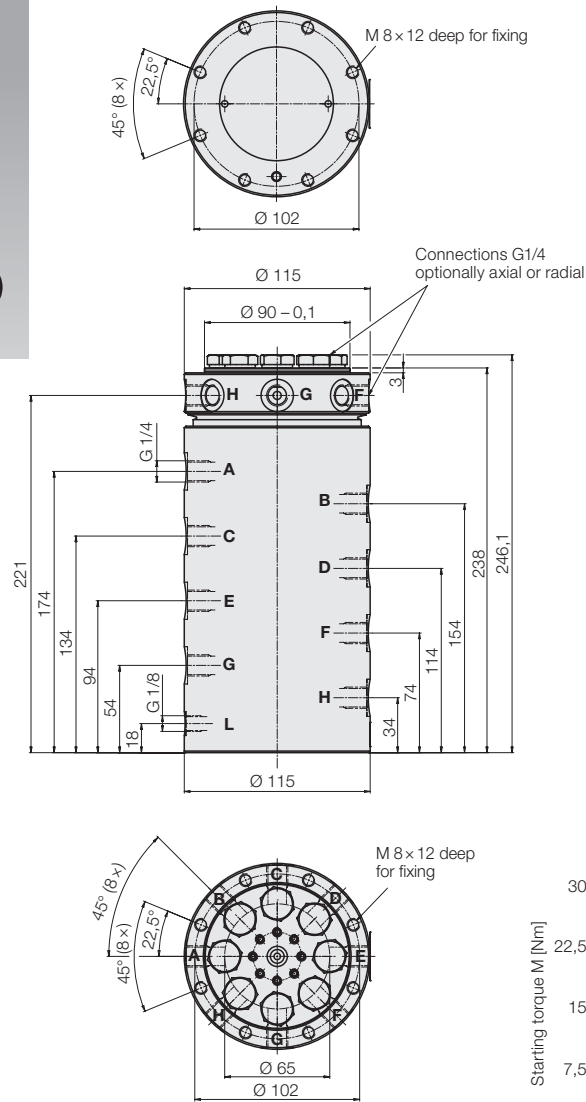

Max. admissible number of rotations  $n$  and starting torque  $M$  as a function of the operating pressure  $p$

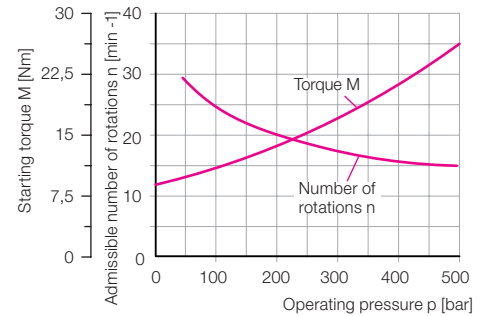


## Hydraulic circuit diagram

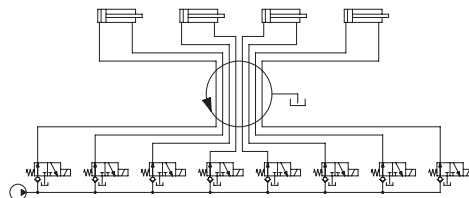

## Rotary coupling ND 5

Operating pressure range [bar]	Weight [kg]	Part no.
10 – 500	20.2	9288 135

## Application example

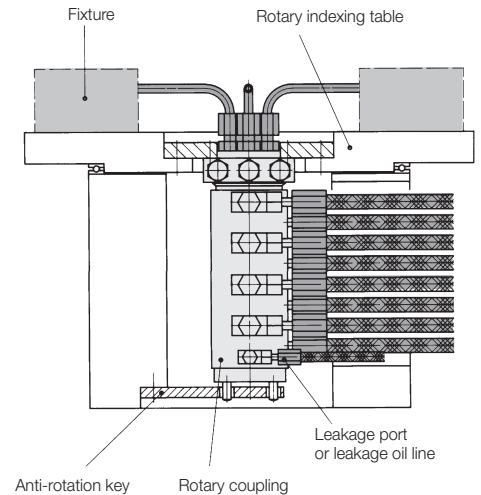


Operating conditions, tolerances and other data see data sheet A 0.100.


Ten Passage Rotary Coupling



Ten passage rotary coupling  
with leakage oil recirculation in the housing

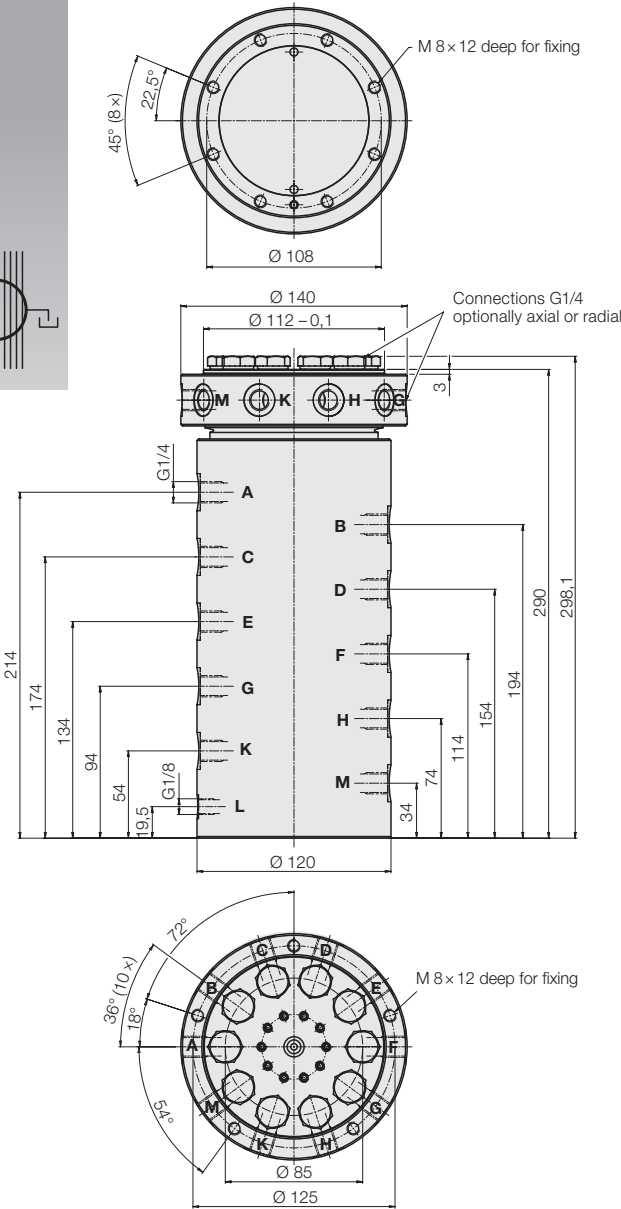

Hydraulic circuit diagram

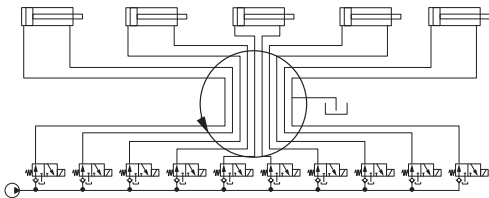

Rotary coupling ND 5		
Operating pressure range [bar]	Weight [kg]	Part no.
10 – 500	28	9280 135

Application examples

